

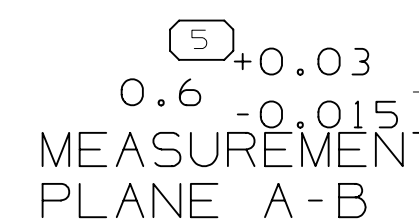



PLATING OPTIONS



ISO VIEW
FOR REFERENCE ONLY
SCALE 5:1

					CHANGED PLATING THICKNESS
					UNIFORM PLATING : 0.10 0.25 0.4 1.0 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 11.0 12.0 13.0 14.0 15.0 16.0 17.0 18.0 19.0 20.0 21.0 22.0 23.0 24.0 25.0 26.0 27.0 28.0 29.0 30.0 31.0 32.0 33.0 34.0 35.0 36.0 37.0 38.0 39.0 40.0 41.0 42.0 43.0 44.0 45.0 46.0 47.0 48.0 49.0 50.0 51.0 52.0 53.0 54.0 55.0 56.0 57.0 58.0 59.0 60.0 61.0 62.0 63.0 64.0 65.0 66.0 67.0 68.0 69.0 70.0 71.0 72.0 73.0 74.0 75.0 76.0 77.0 78.0 79.0 80.0 81.0 82.0 83.0 84.0 85.0 86.0 87.0 88.0 89.0 90.0 91.0 92.0 93.0 94.0 95.0 96.0 97.0 98.0 99.0 100.0

ACCEPTABLE CABLE SEAL

PART NUMBER	GRIP CODE	WIRE SIZE	CW	CH	CRIMP STYLE	CW	CH	CRIMP STYLE
			CONDUCTOR			INSULATION		

PART NUMBER	GRIP	PART NUMBER	GRIP	PART NUMBER	GRIP	PART NUMBER
-------------	------	-------------	------	-------------	------	-------------

DIMENSIONAL RANGE		TOLERANCE UNLESS OTHERWISE SPECIFIED							CHART "E"	
FROM	TO	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300
		20	30	70	100	150	200	250	300	400
TOLERANCE UNLESS OTHERWISE SPECIFIED										
		±0.15	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8	±1	±1.2

DIMENSIONS ENCLOSED IN () INDICATE
REFERENCE DIMENSIONS AND NO TOLERANCE
LIMITS ARE ESTABLISHED

THIRD ANGLE
PROJECTION

• **APTIV** •