



14


13

16

			•		•				•	•			•			
	12	1 1		10		9	\square	8		7	6			5		4
Ρ	MATERIAL DESCRIPTION	FAREA PLATING (SEE NOTE #8)		RIMP AREA PLATING TYPE(SEE NOTE #8)	С	ONTACT PLATING I.D.	MATERIAL THICKNESS	I.D.	CABLE SIZE (mm²)	CABLE DIAMET	ER B ₁ ± 0.15	B ₂ ±0.25	(H_1)	(H_z)	TO	DLERANCE UNLESS OTHERWISE SPECIF ±0.1 ±0.2 ANGULAR TOLERANCE ±2°
В	COPPER ALLOY	1		1		SN	0.22	25	0.13 - 0.22	0.81 - 1.2	1.5	1.9	1.5	1.7		$ \begin{array}{c c} - ROM \\ TO \end{array} \qquad 0 \\ 12 \end{array} > 12 $
A	COPPER ALLOY	1		1		SN	0.22	22	0.35	1.2 - 1.7	1.95	3	1.8	3		IMENSIONAL RANGE (MM) CHART
B 🗋	COPPER ALLOY	 1		l		SN	0.22	21	0.5	1.4 - 1.9	2.1	3	2.1	33		REFERENCE DIMENSIONS AND NO TOLERANC LIMITS ARE ESTABLISHED
В	COPPER ALLOY	1		1		SN	0.22	17	0.75 - 1	1.7 - 2.34	2.5	3.6	2.6	3.6		DIMENSIONS ENCLOSED IN () INDICATE
B	COPPER ALLOY	 		l		SN SN	0.22	14	1.5 - 2	2 - 2.8	3.6	4.3	3.5	4.2] [2 PROCESS SENSITIVE DIMENS

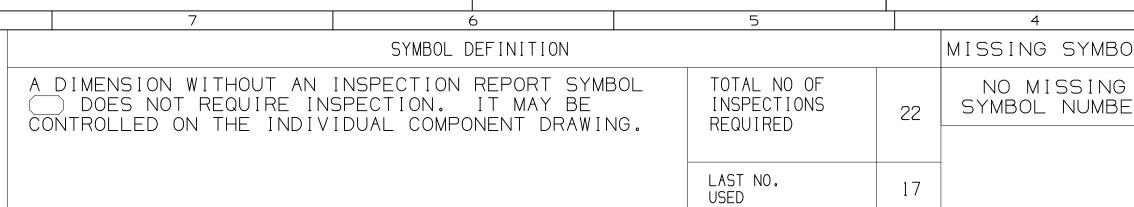

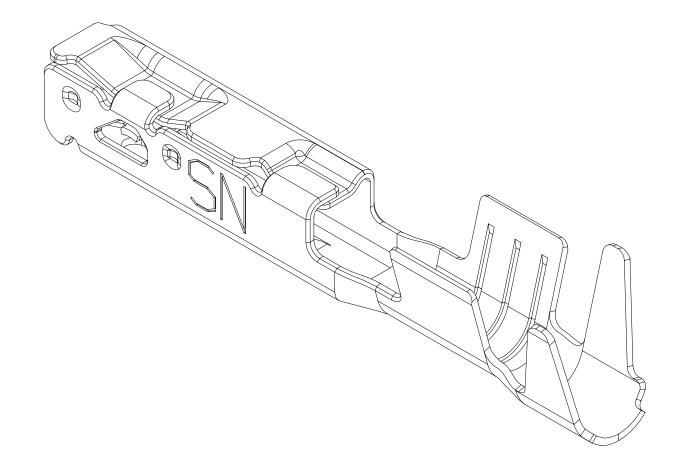

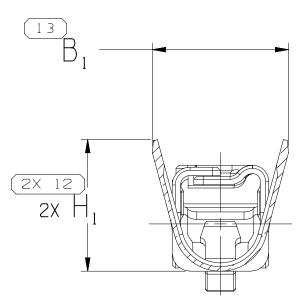

SECTION B-B

NOTES

- 1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
 - DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- 2. RECOMMENDED MATING BLADE THICKNESS 0.8 +0.04/-0.03mm RECOMMENDED MATING BLADE WIDTH NOT TO EXCEED 1.6mm AND NO LESS THAN 1.1mm. SEE USCAR EWCAP-001 (1.5 BLADE) FOR MATING BLADE REQUIREMENTS.
- 3. PLUS ANGLE IS WING BOTTOM SURFACE ROTATED COUNTERCLOCKWISE AGAINST THE BOX BOTTOM SURFACE.
- 4. MAXIMUM CURRENT CAPACITY AS DEFINED BY USCAR-2 R5 SECTION 5.3.3 IS 22 AMPS WITH 2.0mm² COPPER CABLE.

(15)

(2X 14) 2X H

ر L

SECTION C-C

- 5. * DENOTES DIMENSIONS MADE AT CUT-OFF AND CRIMP DIE
- 6. THIS TERMINAL CAN BE USED WITH USCAR CAVITY STANDARD EWCAP-002
- 7. MAXIMUM INSULATION CRIMP WIDTH OF 2.9mm AND HEIGHT OF 3.4mm FOR CABLE SIZE UP TO 2.7mm O.D.
- 8. PLATING TYPE:
- I. REFLOW TIN 1.9 3.3 MICROMETERS THICK OVER NICKEL UNDERPLATE 0.13 - 0.5 MICROMETERS THICK.
- PLATING TYPE INFORMATION SHOWN ABOVE IS REFERENCE ONLY. PLATING REQUIREMENTS ARE CONTAINED IN APPLICABLE MATERIAL SPECIFICATION.
- 9. PARTS MEET THE PERFORMANCE REQUIREMENTS OF GMW3191 DEC 2007 AND SAE/USCAR-2 R5 REVISIONS FOR THE FOLLOWING
- CLASSIFICATIONS:
- TEMPERATURE CLASS 3 (-40°C TO +125°C) VIBRATION CLASS 1 (ON BODY OR CHASSIS)
- SEALING CLASS 1 (UNSEALED) FOR GAGE I.D. 25 & 14 SEALING CLASS 2 & 3 (SEALED-CONNECTOR DEPENDENT)
- FOR GAGE I.D. 21 &17
- 10. DO NOT PROBE, TEST OR OTHERWISE CONTACT THE INTERIOR REGION (THE SPRING OR ANY MOVING PART) OF THIS TERMINAL. SEVERE DAMAGE CAN OCCUR, COMPROMISING THE PERFORMANCE OF THE ELECTRICAL INTERFACE.

			Ŭ								
	A LINE DRAWN THROUGH A PART NUMBER INDICATES THAT PHYSICAL PARTS ARE NOT AVAILABLE FOR ORDERING. PART NUMBERS THAT DO NOT HAVE A LINE PRESENT INDICATE	• APTIV • CONNECTION SYSTEMS WARREN, OH									
	THAT PHYSICAL PARTS ARE AVAILABLE FOR ORDERING.	COPYRIGHT 2017 APTIV. ALL RIGHTS RESERVED.	H								
	DWG TYPE PART DRAWING	THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD MATH DATA, AS WELL AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.									
-	STYLE	DATE									
-	/OLUME (CM ³) DISTR CODE	DR									
		APVD1YAMIRTELLEZ10AP17APVD2YAMIRTELLEZ10AP17APVD3R.SNADER10AP17	B								
+		APVD4	-								
	UNLESS OTHERWISE SPECIFIED THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE GM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM-2001. SEPARATE PATTERNS OF FEATURES MAY BE GAGED SEPARATELY REGARDLESS OF DATUM	APVD5 SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER APTIV 10949001									
	REFERENCES.	SEE CHART									
	ALL DIMENSIONS ARE IN MILLIMETERS										
SION	REFERENCE	DRAWING NAME									
E ICE		TAXI TERM F OCS 1.5									
- D	THIRD ANGLE DO NOT PROJECTION SCALE	$\begin{bmatrix} \text{DRAWING NUMBER} \\ 1 3849927 \end{bmatrix}$	A								
FIED		SIZE SCALE FRAME NO SHEET NO STG REV N/ A0 10:1 1 0F 1 3 0F R 04 -	D								
	3	2 1									

				ک					2				1			
BOLS	[DWG S	STATU	IS		ZONE	REVISION HISTORY					AUTH	DR		APVD	
	DATE	STG	REV	N/P	CHG	ZONL								1	2	
IG BER	10AP17	R	01	-	-		ALL PARTS - RELEASED PART DRAWING						434477	KYT	KYT	RBS
	28JN17	R	02	-	-		ALL	PARTS - L	JPDATED F	PART AVA	ILABI	_ITY	437113	JVR	JVR	RBS
	30MY22	R	03	-	-		3503	PARTS - / 31567 - Re IETER				CHART;	557468	WJL	WJL	DD
	04SE23	R	04	-	-		ALL	PARTS - L	JPDATED F	PDM ATTF	RIBUTE	5	561652	AHY	JAA	ACA

 $\left| \left| \right\rangle \right|$