

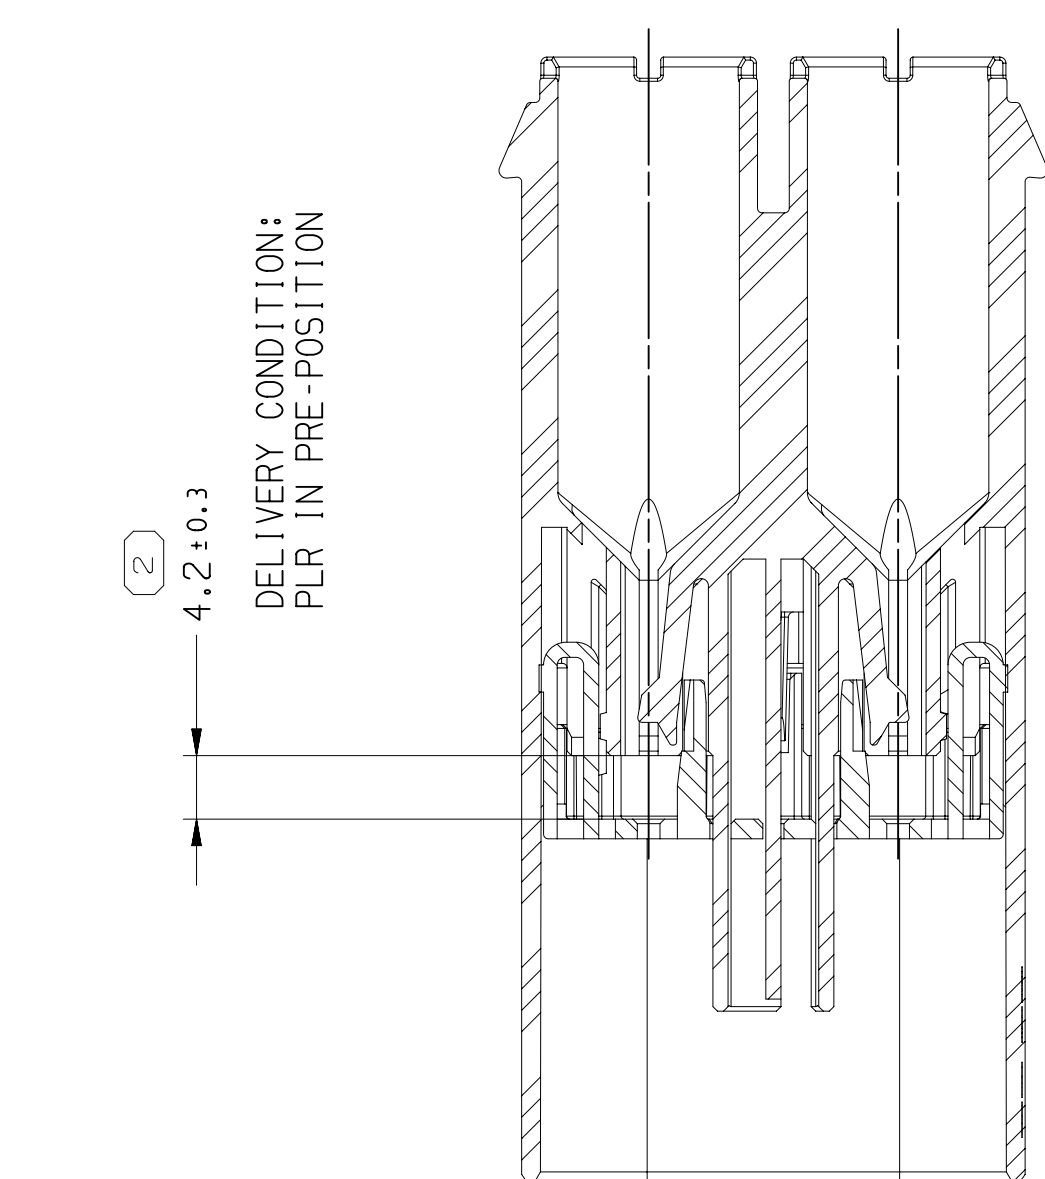
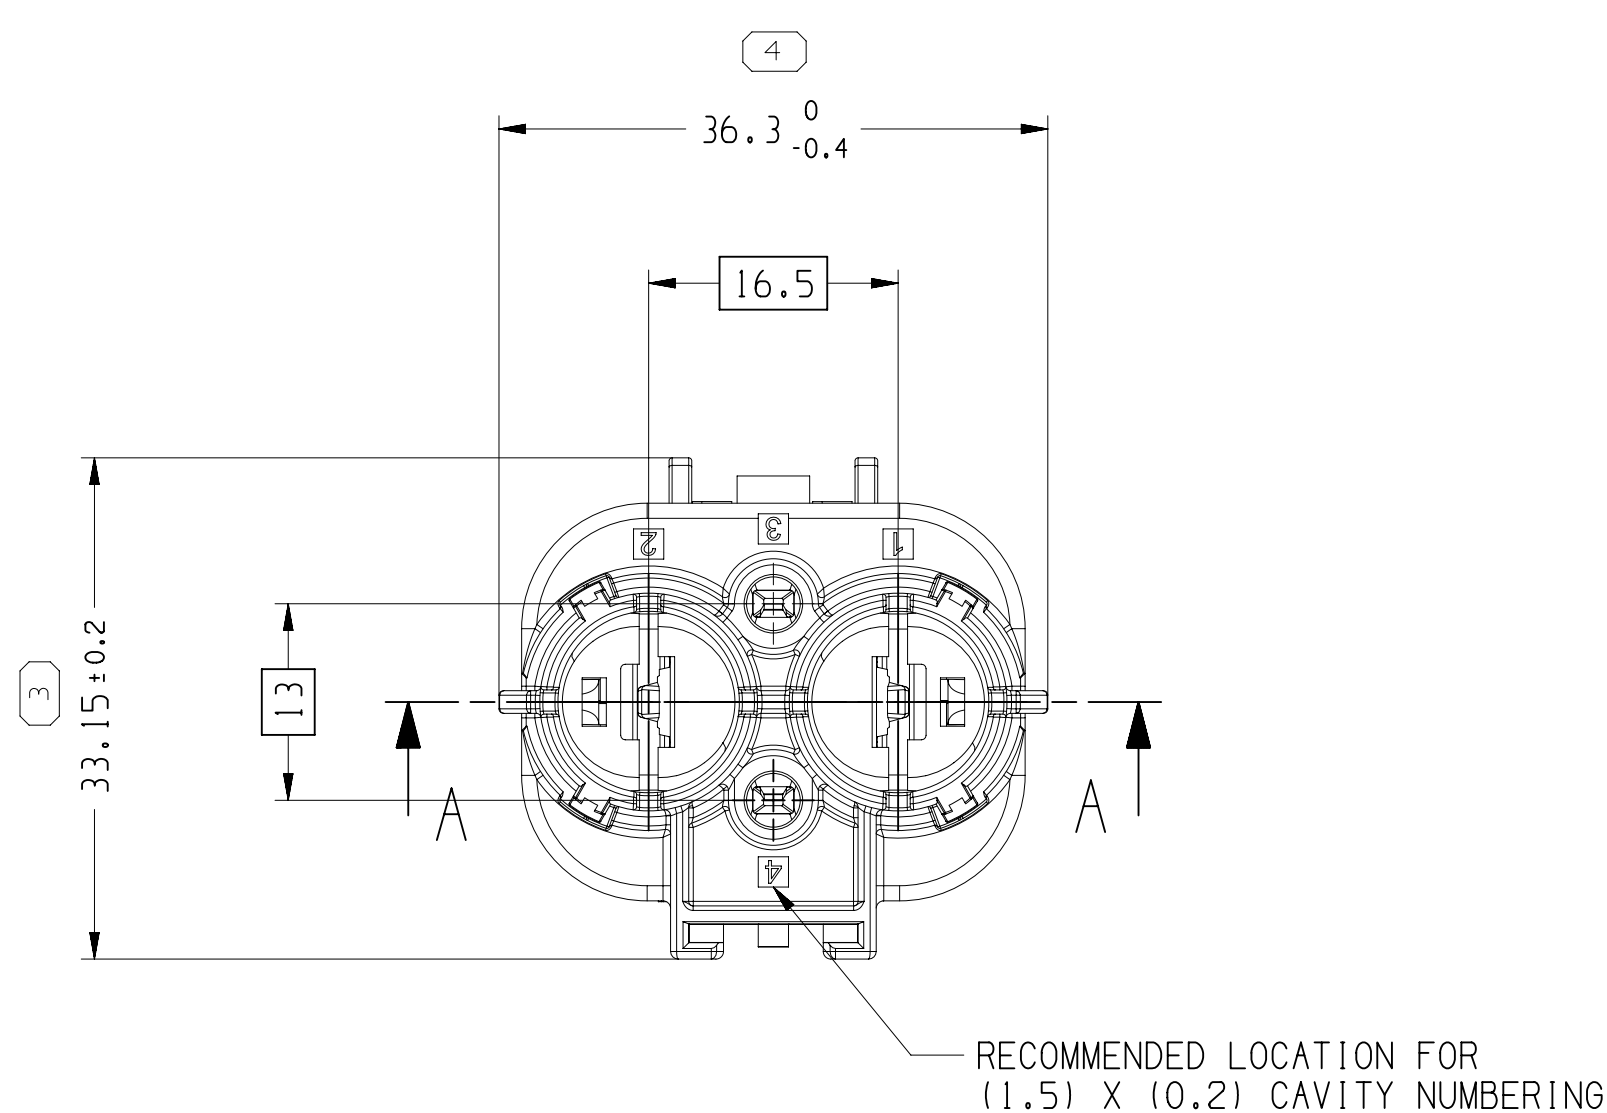


SUITABLE TERMINALS					SUITABLE SINGLE WIRE SEAL	
TERMINAL SIZE	TERMINAL TYPE	PART NUMBER	WIRE SIZE (MM²)	PLATING	PART NUMBER	FOR INSULATION (MM)
1.2	2X MALE TERMINAL APEX 1.2 MM	33219167	0.75-1.25	Sn	15339412	1.9-2.1
		33219166	0.3-0.5		15327913	1.2-1.6
		33219169	0.75-1.25	Ag	15339412	1.9-2.1
		33219168	0.3-0.5		15327913	1.2-1.6
9.5	2X MALE TERMINAL DCS 9.5 MM	10756638	>6.0-10.0	Sn	35522043	4.6-6.0
		10756639	4.0-6.0		15327788	3.4-4.3
		35845500	>13.0-16.0	Ag	35679050	6.2-7.2
		13667456	>6.0-10.0		35522043	4.6-6.0
		13985934	4.0-6.0		15327788	3.4-4.3

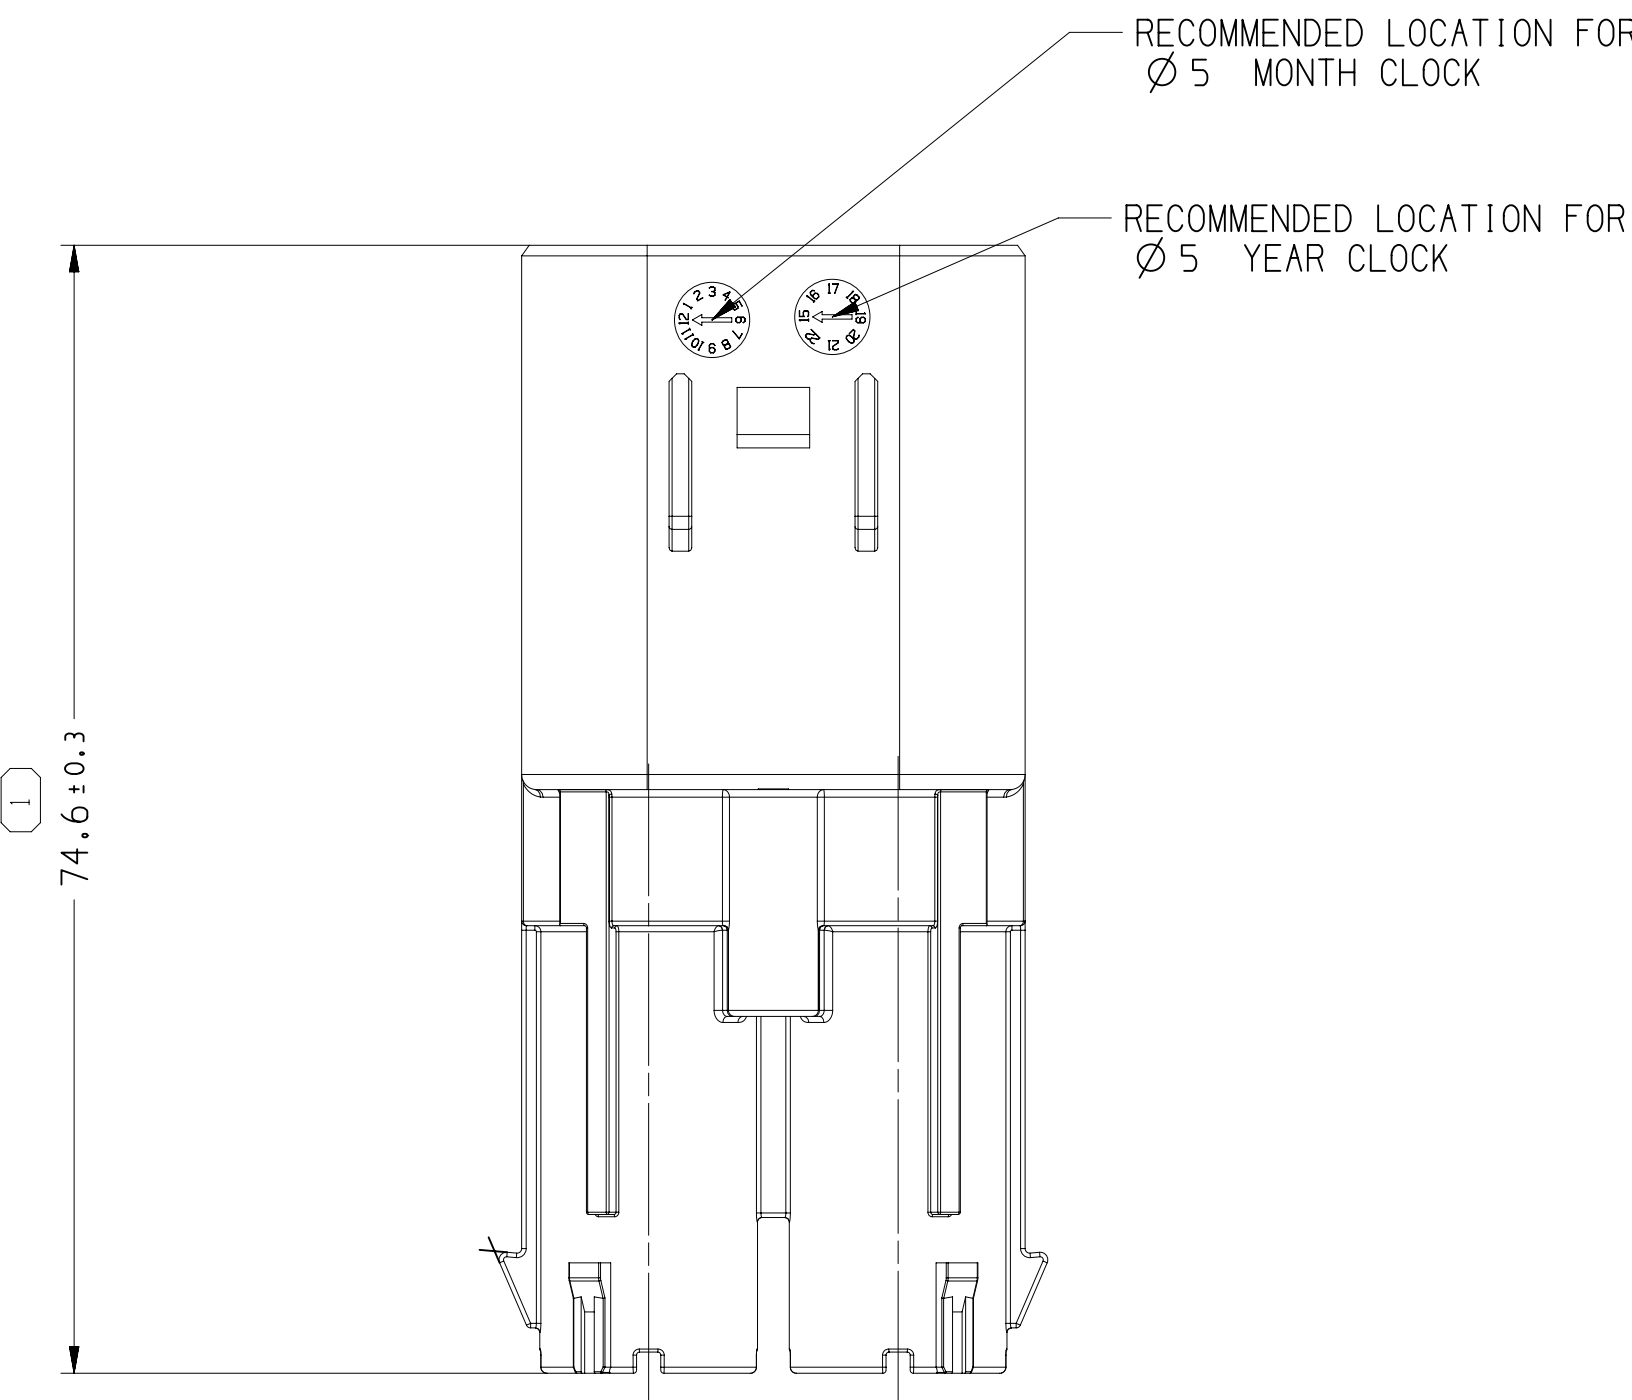


SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL  DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	4
	LAST NO. USED	4

MISSING SYMBOLS		DWG STATUS				ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
NO MISSING SYMBOL NUMBER		DATE	STG	REV	N/P						
20JN21		R	01	-	-		CREATED PART DRAWING	447764	SHR	KHZ	SBH
05JN22		R	01	AA	-		OPTIMIZATION DRAWING	447901	WN	KEV	JNY
22DE24		R	01	AB	-		Add 16MM ² Terminal Information	448554	WN	KEV	JNY

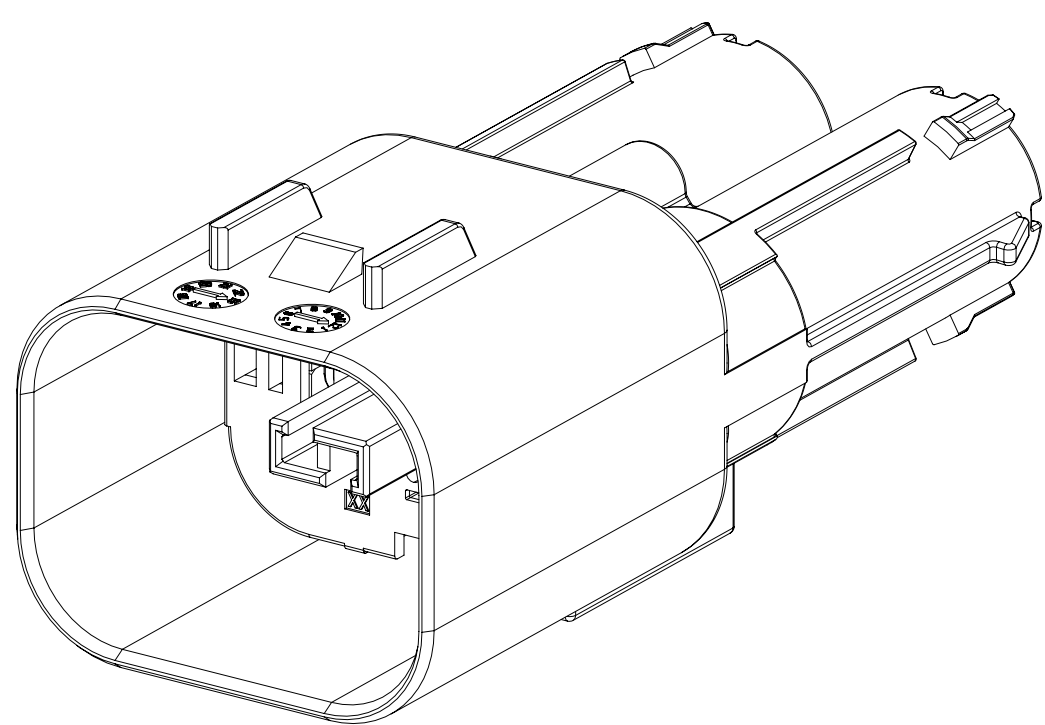

3D VIEW

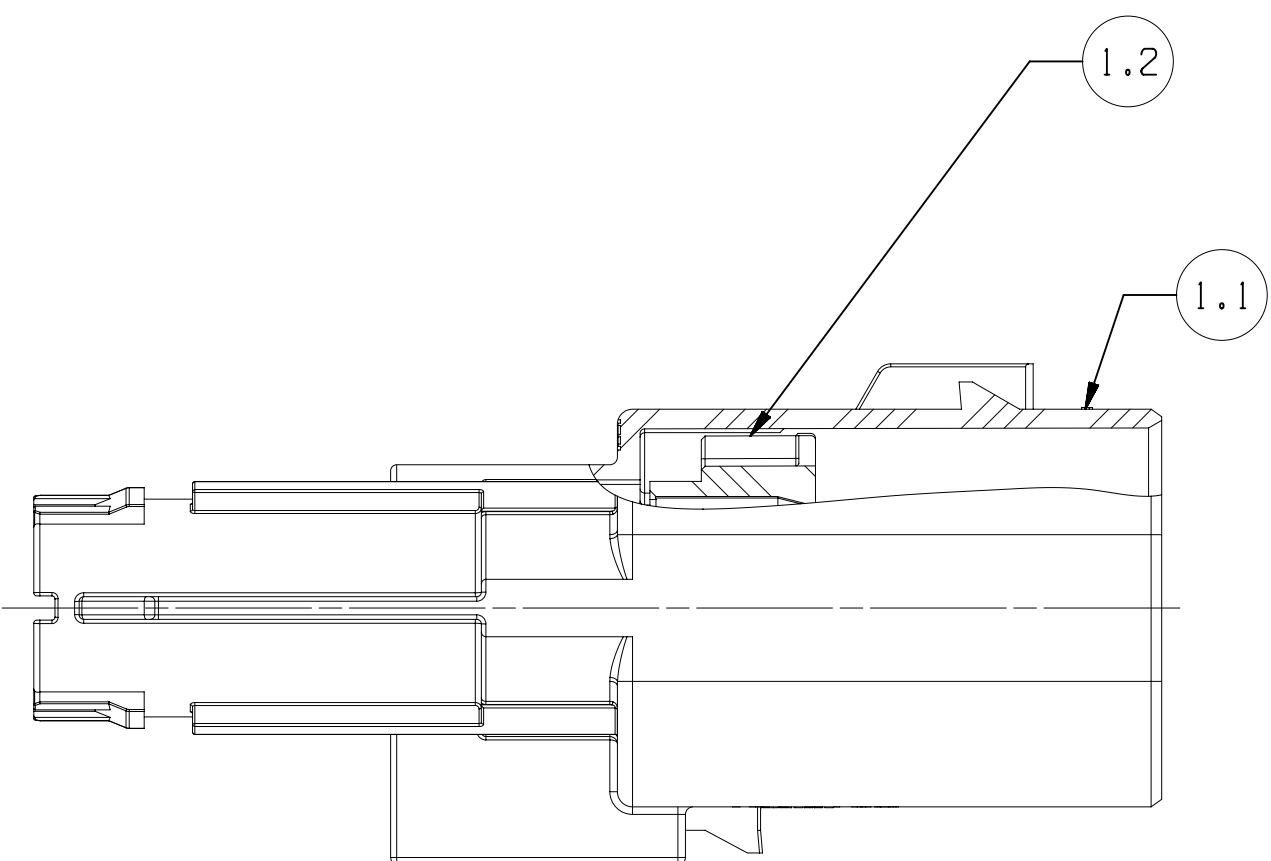

NOTES:

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR TOOL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA. ALL RADII 0.5
ALL CHAMFERS 0.5 X45°
DRAFT IS .5° MAX ON ALL OUTSIDE SURFACE.
LIKE CAVITIES ARE IDENTICAL.
- MATERIAL RECYCLING CODE PER ISO 11469. ((1.1))X((0.1)) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE.
- FOR APPLICATION DATA SEE APPLICATION DRAWING.

PROCESS SENSITIVE DIMENSION

DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSING AND NO TOLERANCE LIMITS ARE ESTABLISHED

DIMENSIONAL RANGE (MM)		TOLERANCE (UNLESS OTHERWISE SPECIFIED)	
FROM	TO		
> 0	> 6	> 30	> 70
> 6	> 30	> 30	> 70
> 30	> 60	> 60	> 120
> 60	> 120	> 120	> 160
> 120	> 160	> 160	> 200
> 160	> 200	> 200	> 250
> 200	> 250	> 250	> 315
> 250	> 315	> 315	> 400
TOLERANCE (UNLESS OTHERWISE SPECIFIED)		ANGULAR TOLERANCE ±1°	
±0.1		±0.2	
±0.2		±0.3	
±0.3		±0.4	
±0.4		±0.45	
±0.45		±0.55	
±0.55		±0.7	
±0.7		±0.85	
±0.85		±1.05	

PART DRAWING	
STYLE	
VOLUME (CM)	DISTR CODE
SEE CHART	D
UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2019. SEE APTIV ENGINEERING DESIGN STANDARD 06-2017 FOR ISO 1101:2004 RECONSTRUCTION REQUIREMENTS.	
ALL DIMENSIONS ARE IN MILLIMETERS	
REFERENCE	
THIRD ANGLE PROJECTION	DO NOT SCALE
USE MATH DATA	NX

• APTIV •	
CONNECTION SYSTEMS	
Anqing, China	
COPYRIGHT 2024 APTIV. ALL RIGHTS RESERVED.	
THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD DATA, AS WELL AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.	
DR	DATE
APVD1: WANG NIAN	22DE24
APVD2: KEVIN ZHOU	22DE24
APVD3: JONNY ZHENG	22DE24
APVD4:	
APVD5:	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT (094900) (094900)	
MATERIAL: SEE CHART	
DRAWING NAME: TAX1 ASM CONN 4 M CTS	
DRAWING NUMBER: 120 950 SLD	
35522069	
SIZE: A0	SCALE: 2:1
FRAME NO: 1	SHEET NO: 1 OF 1
STG REV: 01	N/P

4W MALE ASM	35522025	1.2	PLR	1	POLYESTER BLEND, RED	35522029
ASSEMBLY NAME	ASSEMBLY NO	REP.	DESIGNATION	QTY	MATERIAL / COLOUR	APTIV P/N